

THE PRODUCT FEATURES



Easy installation.

Floor may be DIY easy installed with click lock.



Water proof.

Raw material are PVC plastic. So floor is waterproof.



Environment Friendly.

PVC resin and natural limestone powder are the major raw material, radioactive elements excluded. And formaldehyde release is strictly follow international standard.



Anti-bacterial.

Raw material are PVC plastic. The floor is anti-bacterial floor.



Good abrasion.

Floor is produced with a special wear layer. It's durable very much.



Dimension stability.

Floor is produced with special process with best dimension stability.



Good resistance to indentation.


Floor is produced with strong and stable material. So the floor is good anti indentation capability.



Termite proof.

Raw material are PVC plastic. the material is termiteproof

The Product Structure

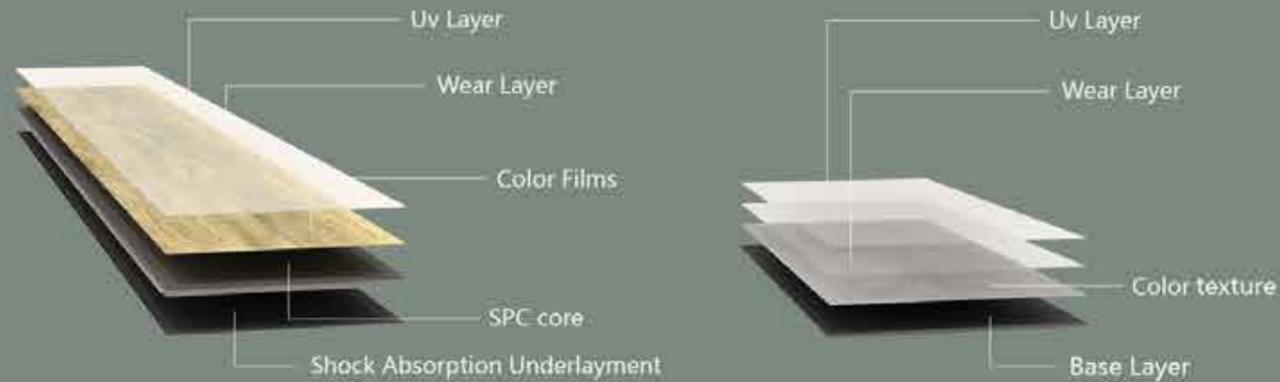

LOADING & PACKING OF SPC-WOOD PATTERN

TYPE	SPECIFICATION (T*W*L)	PCS/CTN	m ² /CTN	CTN/PALLET	KGS/CTN	PALLET/20GP	m ² /20'	KGS/20'	KGS/Limit
SPC	4.0/0.3 × 177.8 × 1219.2mm	10	2.1677	60	18.21	20	2601.285	22700	23000
	4.2/0.3 × 177.8 × 1219.2mm	10	2.1677	60	19	20	2601.285	23700	24000
	4.5/0.3 × 177.8 × 1219.2mm	9	1.95	60	18.45	20	2341.16	23000	24000
	5.0/0.3 × 177.8 × 1219.2mm	8	1.734	60	18.21	20	2080.8	22700	23000

LOADING & PACKING OF SPC-STONE PATTERN

TYPE	SPECIFICATION (T*W*L)	PCS/CTN	m ² /CTN	CTN/PALLET	KGS/CTN	PALLET/20GP	m ² /20'	KGS/20'	KGS/Limit
SPC	4.2/0.3 × 600 × 300mm	12	2.16	54	19	20	2332.80	25110.26	25500
	5.0/0.3 × 600 × 300mm	10	1.80	54	18.85	20	1944	20925.22	23000
	5.0/0.3 × 600 × 300mm	10	1.80	54	18.85	20	1944	20925.22	23000

Sample Display SPC Flooring



SC8001 Garner Bai Lamu



SC8002 Austria oak



SC8003 Swedish oak



SC8004 Belgian oak



SC8005 Swedish oak



SC8006 Iceland oak



SC8007 Sri Lankan oak



SC8008 Macedonian oak



SC8009 Bulgarian oak



SC8010 Finland oak



SC8011 Monaco oak



SC8012 Italy oak

Sample Display


SPC Flooring



◆ SC81001-3
Gray cement




◆ SC81001-2
Brown cement

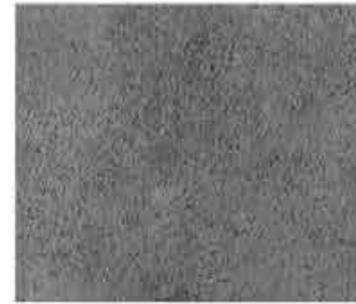

◆ SC81001-4
Deep gray cement




◆ SC8863
Gray skarn

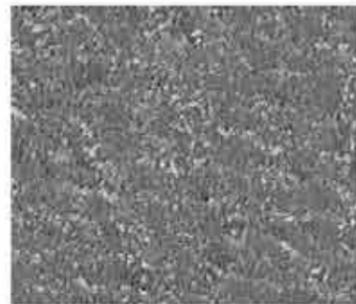

◆ SC8861
Deep grayish skarn



◆ SC8860
Brown skarn

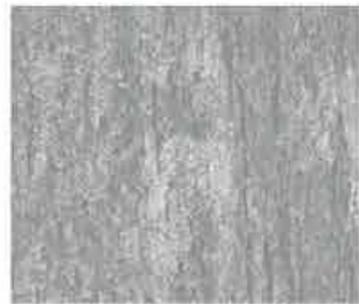

◆ SC8881
Gray limestone



◆ SC8882
Purple gray limestone



◆ SC8880
Deep grey limestone



◆ SC8273
White marble




◆ SC8058
Rosin yellow



◆ SC8274
Black marble

Installation Steps

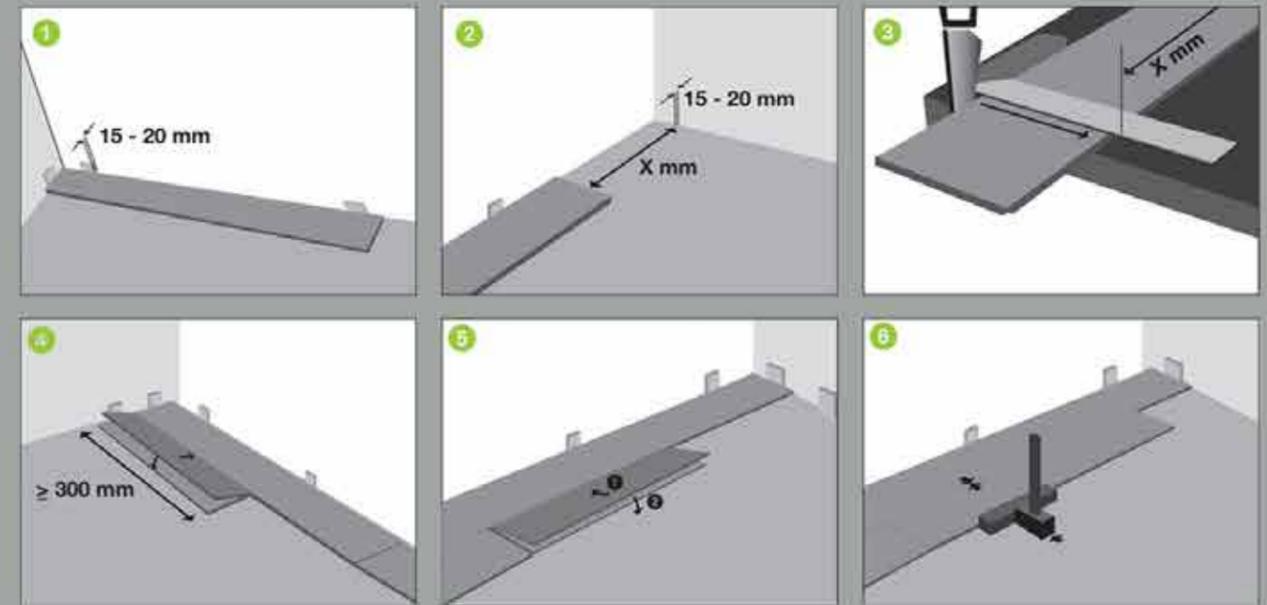

Step 1. The B plate tenon plate A inclined in the fillster locking, and then put it flat.

Step 2. After put it flat, the B plate and C plate spacing about 2-3mm, into parallel lines.

Step 3. Lift up the plates A and B at the same time (Note: with the ground at a 45 degree angle)

Step 4. The B plate along C plate direction, flat push

Step 5. With the palm of your hands, flatten the plates A and B, but do not force to press to the floor.

Step 6. The floors are smooth without slit after installation. If the floor are not smooth or have slit, they need to be lifted and locked by 10-30degree angle. After locking, floor would be smooth automatically.

Warranty: 15 YEARS





SEE SUN LUXURY VINYL FLOORING SERIES COMBINES BEAUTIFUL WOOD PATTERNS WITH EASY LOCKING SYSTEM.

This is a high end resilient,durable and water resistant flooring.We provide a vast array of options of colors for your choices.It is suitable to be used at kitchen and bathroom.

Product specifications:

Size:936*150mm,1220*150mm,1220*180mm,
1220*228mm,1500*228mm

Thickness:3.2mm,4.2mm,5.0mm

Wearlayer:0.1-1.0mm

UV-coating

Unilin easy locking system

LUXURY VINYL FLOORING

Advantages

- 1.easy to install,easy to maintain,easy to replace.
- 2.Special formula and treatment,reinforced by fiber-glass,more stable
- 3.The floors secure itself to sub-floor,no click no glue is needed
- 4.100% virgin PVC,more environmentally friendly.
- 5.Floorscore certified



LOOSE LAY



SEE SUN LOOSE LAY SERIES is amazing,no adhesives or glue is necessary,no click system,the flooring secures itself to your sub-floor,it is free floating.All decors are developed from real engineered floor with natural pattern and color tones.Creating better foot-sense and more natural lookings.

Product specifications:

Size:942*157mm,1227*157mm,1227*187mm,1227*235mm

Thickness:4.0mm,5.0mm

Wearlayer:0.3-1.0mm

UV-coating

LOOSE LAY

Advantages

- 1.Easy to install,easy to maintain,easy to replace.
- 2.Special formula and treatment
- 3.The floors secure itself to sub-floor,no click no glue is needed.
- 4.100% virgin PVC,more environmentally friendly
- 5.Floorscore certified

WOOD



◆ SS002



◆ SS006



◆ SS007



◆ SS003



◆ SS008



◆ SS009



◆ SS004



◆ SS010



◆ SS011



◆ SS012



◆ SS013



◆ SS014



◆ SS015



WOOD



◆ SS016



◆ SS017



◆ SS018



◆ SS019



◆ SS020



◆ SS021



◆ SS022



◆ SS023



◆ SS024



◆ SS025



◆ SS026



◆ SS027



◆ SS028



◆ SS029



◆ SS030



WOOD




◆ SS031



◆ SS035



◆ SS040

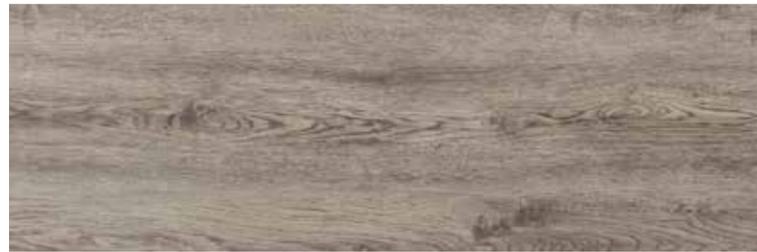

◆ SS032



◆ SS036



◆ SS041



◆ SS033



◆ SS037



◆ SS042



◆ SS001



◆ SS038



◆ SS043



◆ SS034



◆ SS039




◆ SS044



WOOD



◆ SS045

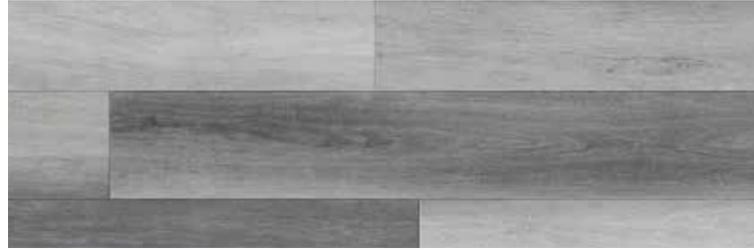

◆ SS050



◆ SS055



◆ SS046



◆ SS051



◆ SS056



◆ SS047



◆ SS052



◆ SS057



◆ SS048



◆ SS053




◆ SS058



◆ SS049



◆ SS054

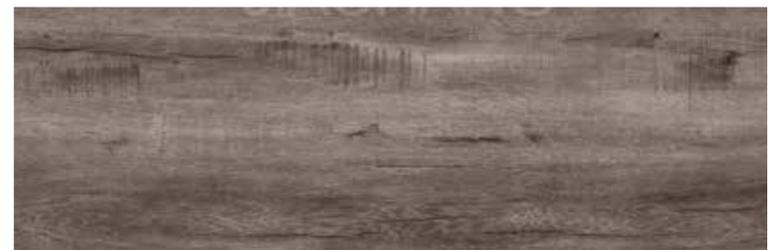

◆ SS059



WOOD



◆ SS060



◆ SS061



◆ SS062



◆ SS063



◆ SS064



◆ SS065



◆ SS066



◆ SS067



◆ SS068



◆ SS069



◆ SS070




◆ SS071



◆ SS072




◆ SS073

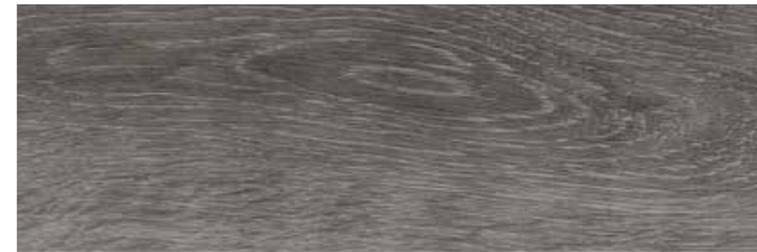

◆ SS074



STONE

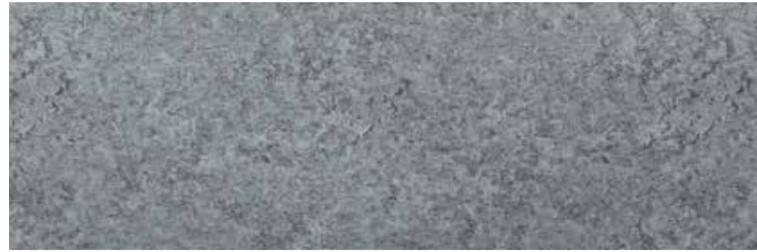

◆ SM001



◆ SM002



◆ SM003



◆ SM004



◆ SM005



◆ SM006



◆ SM007



◆ SM008



◆ SM009



◆ SM010



◆ SM011



◆ SM012



◆ SM013



◆ SM014

